

PCB header strips connect 2.54mm

Single row/double row


Solder tail

Series: PHC

PCB header strips for wiring application with solder tail / connecting pin

Technical Specs:


Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass CuZn 36pb3(36000)
Mating pin Ø:	0.45 mm
Mechanical life:	min 500 cycles
Rated current:	3 A
Contact resistance:	max 10 mΩ
Dielectric strength:	min 1000V _{RMS}

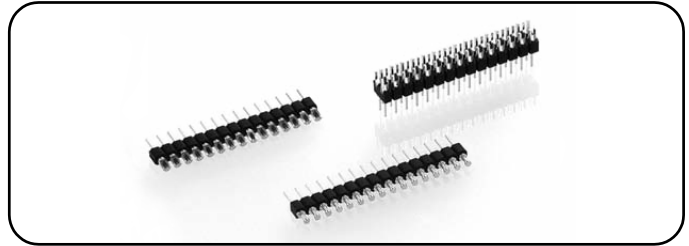

Ordering information


PHC - NNN X - A P 1275A

No. of Positions	Insulator Type code	Pin Plating code
	1 Single row	1 Tin150μ"
	2 Double row	2 Tin200μ"
		3 GF
		4 Gold2μ"
		5 Gold3μ"
		6 Gold10μ"
		7 Gold15μ"
		S Special

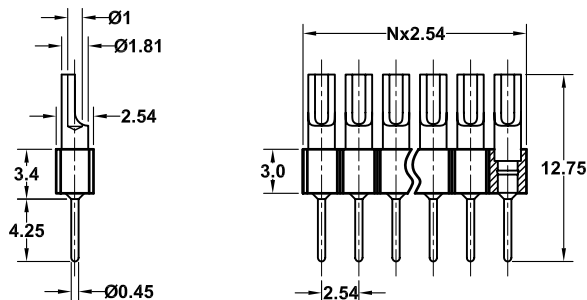

PHC-NNN1-AP1275A

Solder cup strip with wire-wrap termination: **single row**
Availability from: 2 to 40 contacts
Standard number of contacts 40

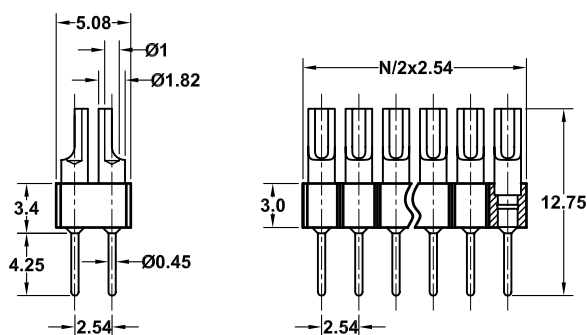

PHC-NNN2-BP1275A

Solder cup strip with wire-wrap termination: **double row**
Availability from: 4 to 80 contacts
Standard number of contacts 80