
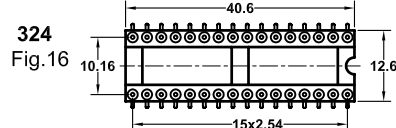

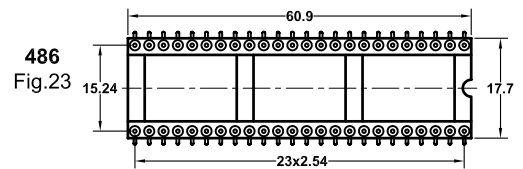
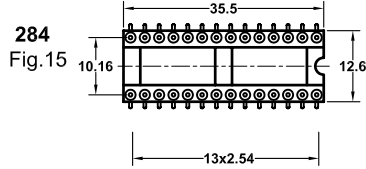

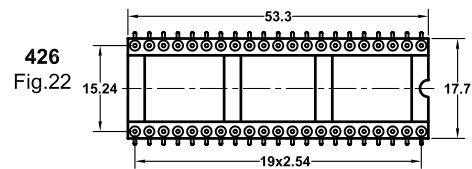


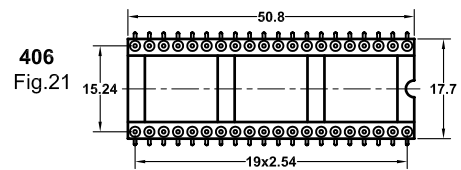


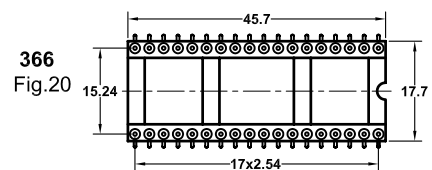


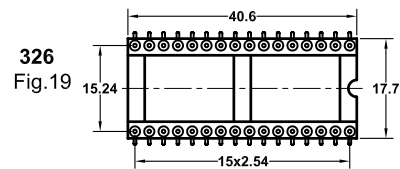
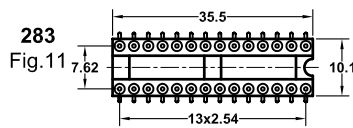

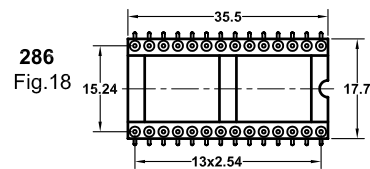






Dual-in-line pin headers 2.54mm

Insulator bodies Open frame

Surface mount



Ordering information

PHD - NNN X - B P 1020A

No. of Positions	Row spacing code	Pin Plating code
	3 7.62mm	1 Tin150μ"
	4 10.16mm	2 Tin200μ"
	6 15.24mm	3 GF
	9 22.86mm	4 Gold2μ"
		5 Gold3μ"
		6 Gold10μ"
		7 Gold15μ"
		S Special