


0.5mm(0.02") FPC ZIF SMT Type Bottom Contact Style 04 to 60 Contacts

SPECIFICATIONS

Current Rating: 0.5 Amp
 Insulator Resistance: 100 MΩ MIN
 Dielectric Withstanding: AC 500V
 Contact resistance: 20mΩ MAX.
 Operating Temp. : -40°C~+105°C
 Insulator Material: NY-6T ROHS
 Contact Material: Phosphor Bronze
 Plated(*Standard): Fog whole Tin plated

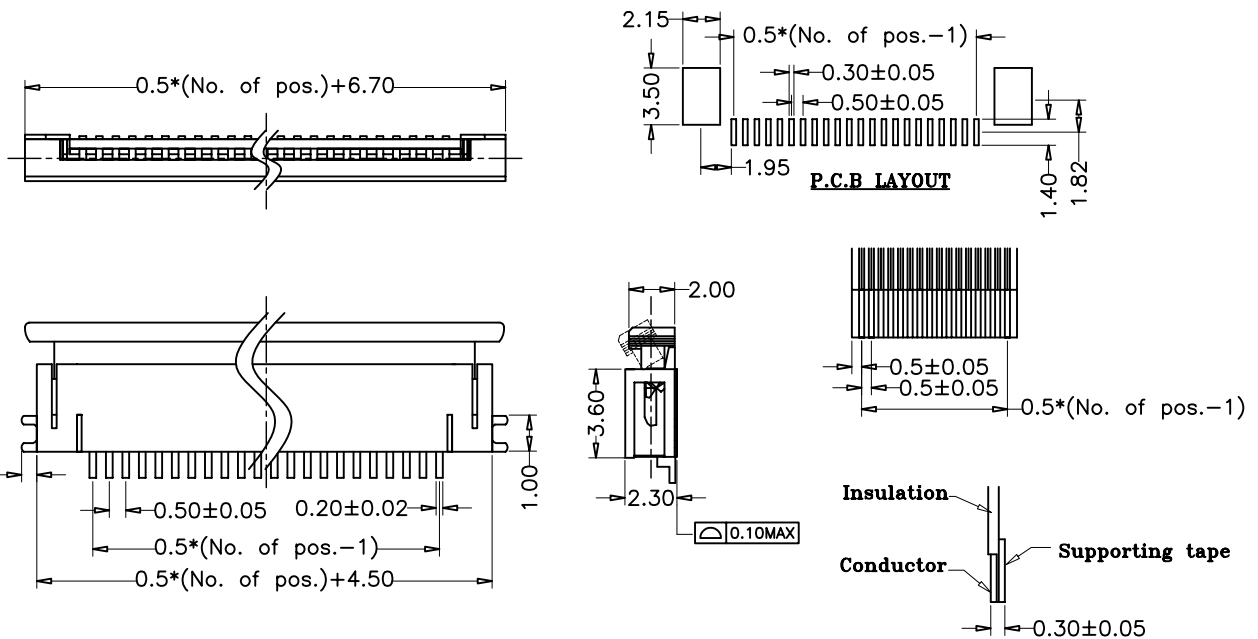

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

F	X	X	X	XX	X	X	--	XX
Pitch	Versions	Row Option	Pin NO	Contact Plating	Connector Type			Glide NO
A 0.30mm B 0.50mm C 0.80mm D 1.00mm E 1.25mm	A 180° B 90° C SMT	1 Single Row 2 Dual Row	02 to 50	01 Tin 02 Gold Flash 03 Gold/Tin	A A Type B B Type			01-99