
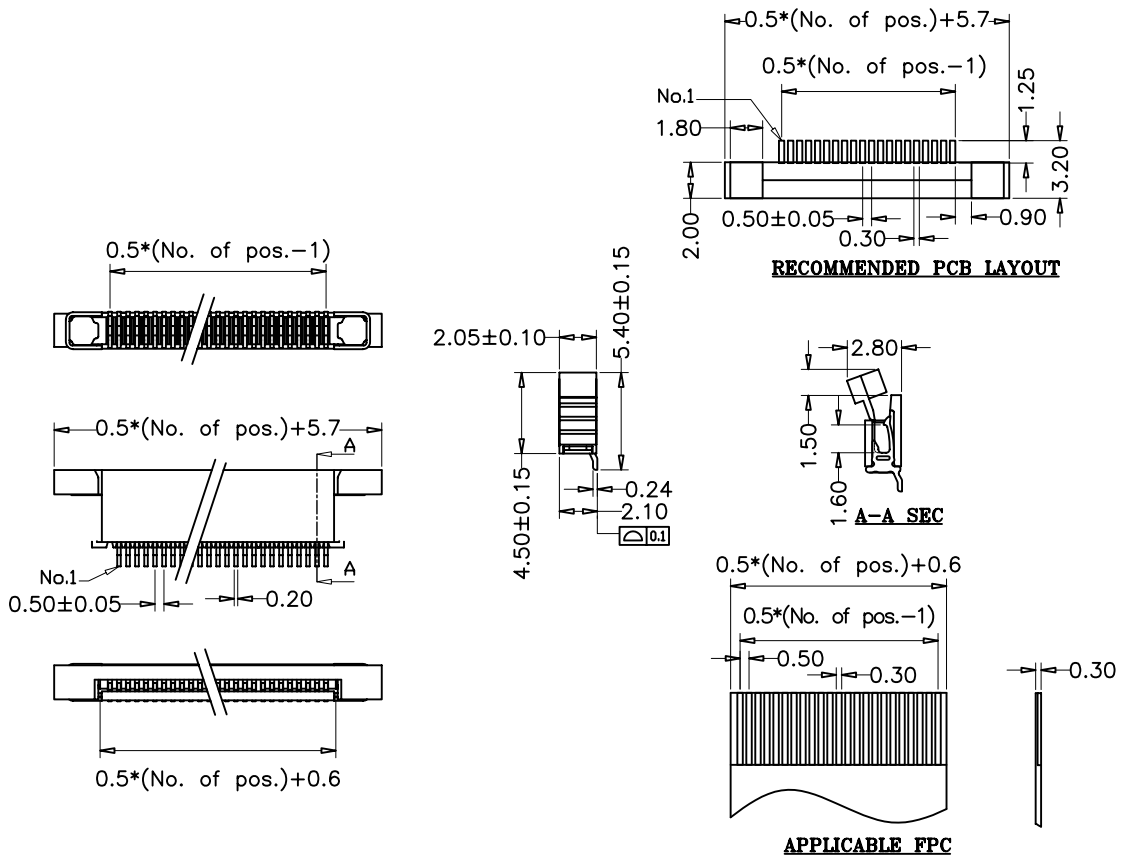


# 0.5mm(0.02") FPC/FFC ZIF SMT Type Bottom Contact Style 04 to 60 Contacts

## SPECIFICATIONS

Current Rating:	0.5Amp
Insulator Resistance:	500Megohms min.
Contact Resistance:	20mmax.
Dielectric Withstanding:	AC 500V
Operating Temp:	-25°C~+85°C
Insulator Material:	PA-46 UL94V-0 ROHS
Loeker Material:	PPS UL94V-0 ROHS
Contact Material:	Phosphor Bronze
Plating:	Tin Plated
Solder tab:	Phosphor Bronze
Plating:	Tin Plated

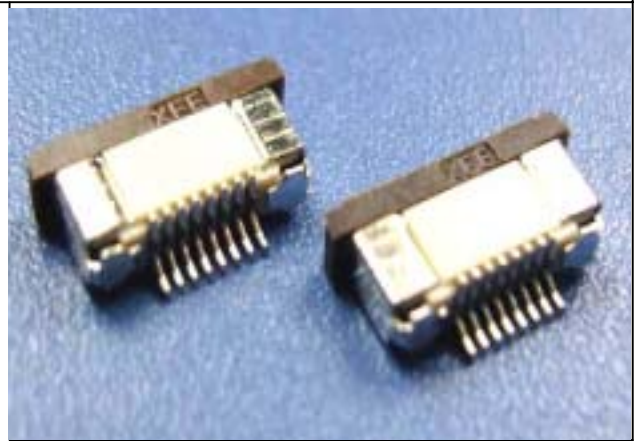

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

F	X	X	X	XX	X	X	--	XX
Pitch	Versions	Row Option	Pin NO	Contact Plating	Connector Type	Glide NO		
A 0.30mm B 0.50mm C 0.80mm D 1.00mm E 1.25mm	A 180° B 90° C SMT	1 Single Row 2 Dual Row	02 to 50	01 Tin 02 Gold Flash 03 Gold/Tin	A A Type B B Type	01-99		