
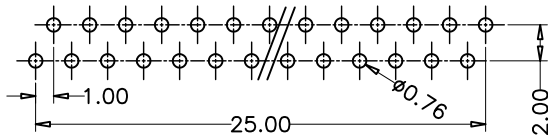

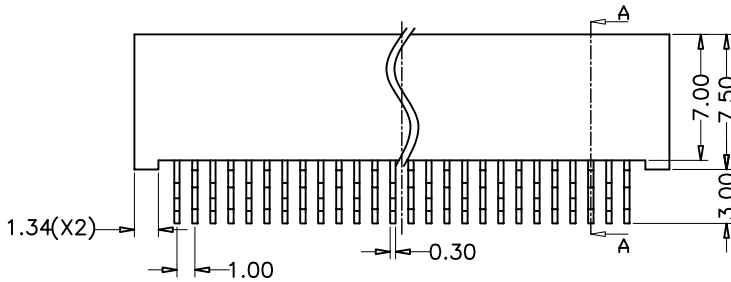
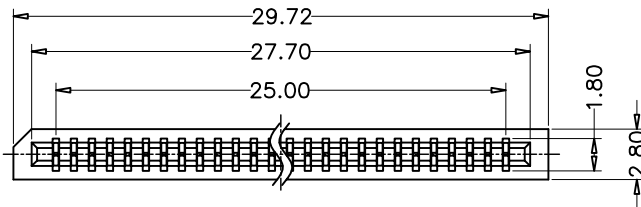



1.0mm(0.0394") FPC ZIF 26 Contacts

SPECIFICATIONS

Current Rating:	0.4 Amp
Insulator Resistance:	100 Megohms min.
Dielectric Withstanding:	AC 250V
Operating Temp. :	-25°C ~ + 85°C
Contact Material:	Copper Alloy
Housing Material:	PA46 (UL94V-0) ROHS
Contact Plated:	Tin Plated

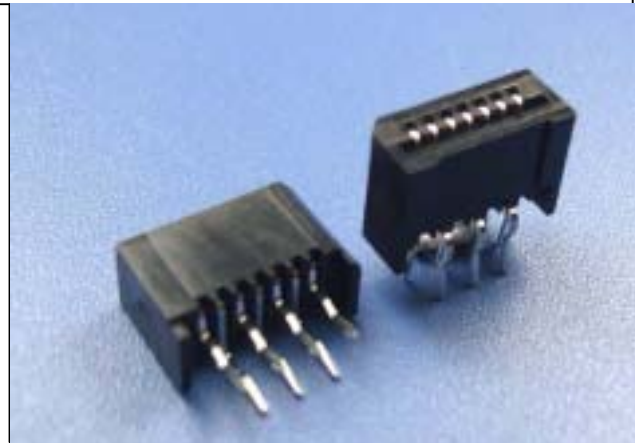

A Type P.C.B Layout

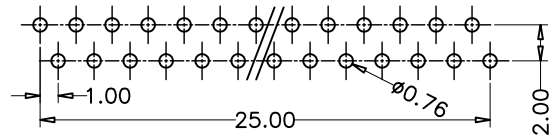

B Type P.C.B Layout

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

F	X	X	X	XX	X	X	--	XX
Pitch	Versions	Row Option	Pin NO	Contact Plating	Connector Type	Glide NO		
A 0.30mm B 0.50mm C 0.80mm D 1.00mm E 1.25mm	A 180° B 90° C SMT	1 Single Row 2 Dual Row	02 to 50	01 Tin 02 Gold Flash 03 Gold/Tin	A A Type B B Type	01-99		