
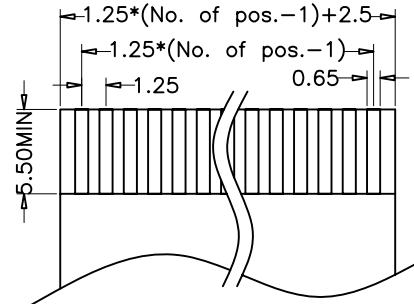
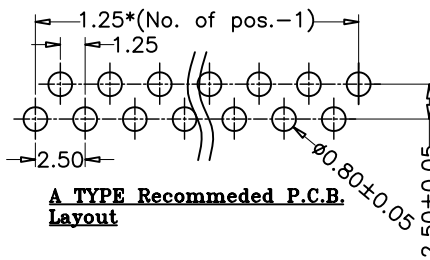
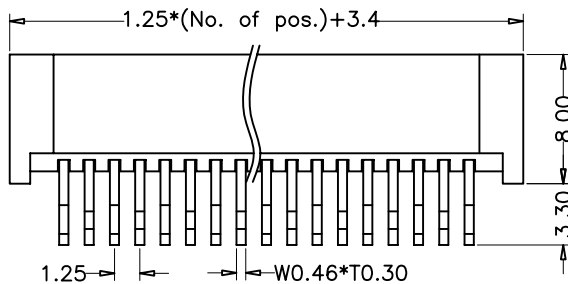
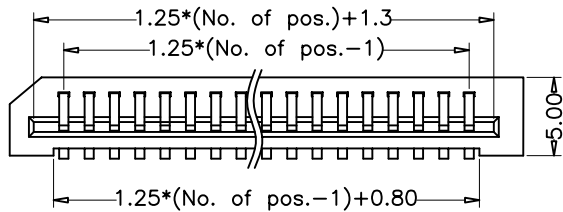




1.25mm(0.492") FPC Non ZIF Contact 02 to 36 Contacts

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 500 Megohms min.
 Dielectric Withstanding: AC 1000V
 Operating Temp.: -40°C ~ +105°C
 Housing Material: PA-6T UL94V-0 ROHS
 Contact Material: Phosphor Bronze
 Contact Plated: Tin Plated over Nickel

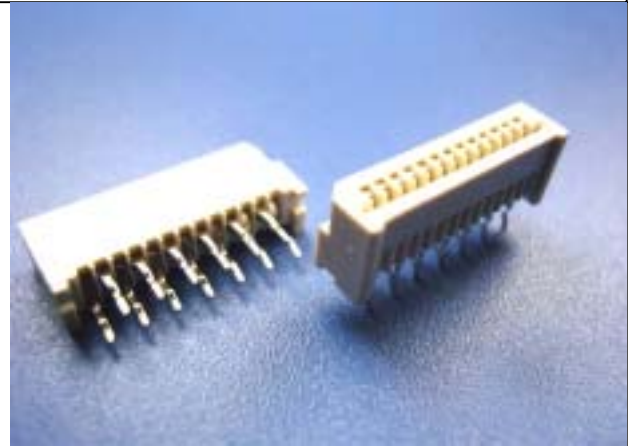

FPC/FFC T=0.30±0.05

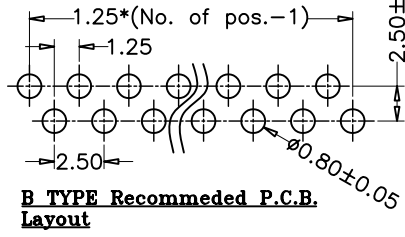

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

F	X	X	X	XX	X	X	--	XX
Pitch	Versions	Row Option	Pin NO	Contact Plating	Connector Type	Glide NO		
A 0.30mm B 0.50mm C 0.80mm D 1.00mm E 1.25mm	A 180° B 90° C SMT	1 Single Row 2 Dual Row	02 to 50	01 Tin 02 Gold Flash 03 Gold/Tin	A A Type B B Type	01-99		