
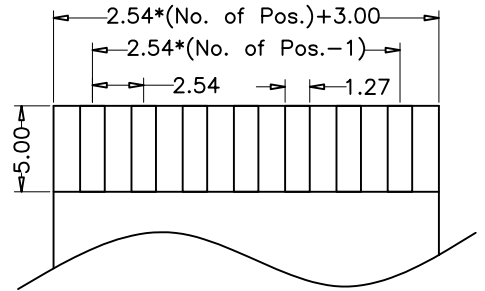
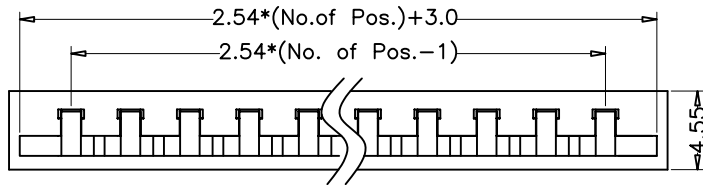





# 2.54mm(0.1") FPC Non ZIF Contact 03 to 27 Contacts

## SPECIFICATIONS

Current Rating: 1 Amp  
 Insulator Resistance: 1000 Megohms min.  
 Dielectric Withstanding: AC 500V  
 Operating Temp.: -55°C ~ +85°C  
 Housing Material: PBT(UL94V-0) ROHS  
 Contact Material: Phosphor Bronze  
 Contact Plated: Tin 100U" Plated

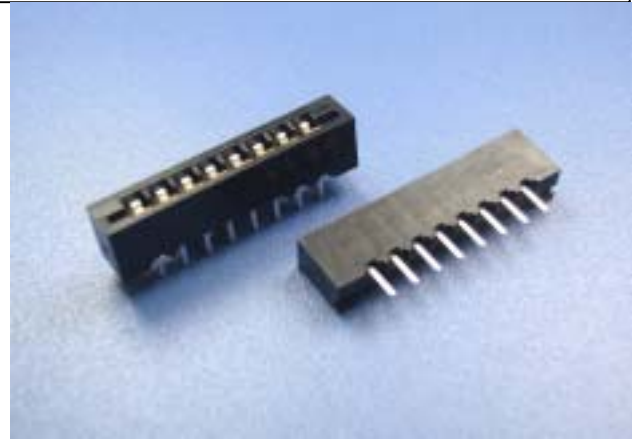

**FPC/FFC t=0.30±0.05**

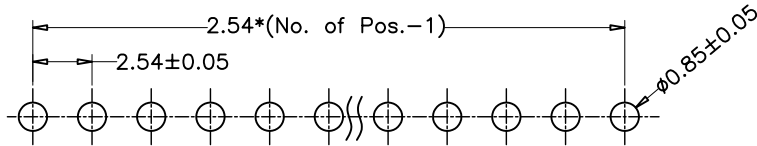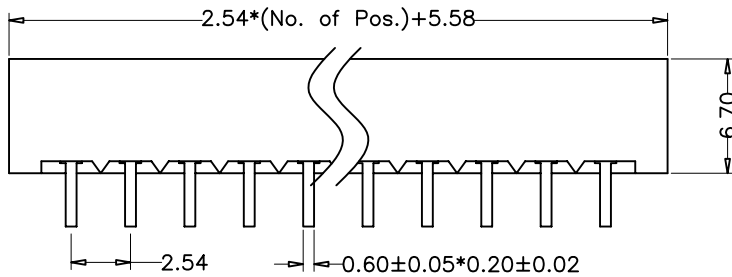

### Recommended P.C.B. Layout

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

F	X	X	X	XX	X	X	--	XX
Pitch	Versions	Row Option	Pin NO	Contact Plating	Connector Type	Glide NO		
A 0.30mm B 0.50mm C 0.80mm D 1.00mm E 1.25mm	A 180° B 90° C SMT	1 Single Row 2 Dual Row	02 to 50	01 Tin 02 Gold Flash 03 Gold/Tin	A A Type B B Type	01-99		