
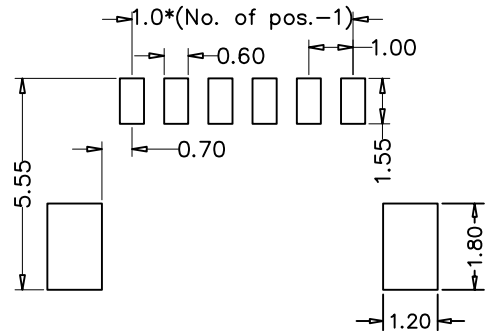
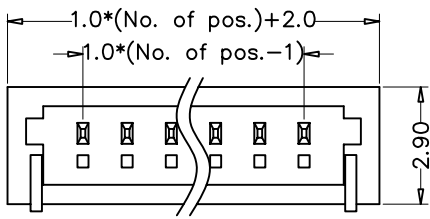



# 1.0mm(0.039") Wafer Single Row SMT Straight Type 02 to 20 Contacts

## SPECIFICATIONS

Current Rating:	1 AMP
Voltage Rating:	AC 50V
Insulator Resistance:	500 Megohms Min.
Withstand Voltage:	AC 500V Min
Operating Temp. :	-25°C ~ +85°C
Contact Material:	Brass
Insulator Material:	NY-6T(UL94V-0) ROHS
Plated(*Standard) :	Tin Plated

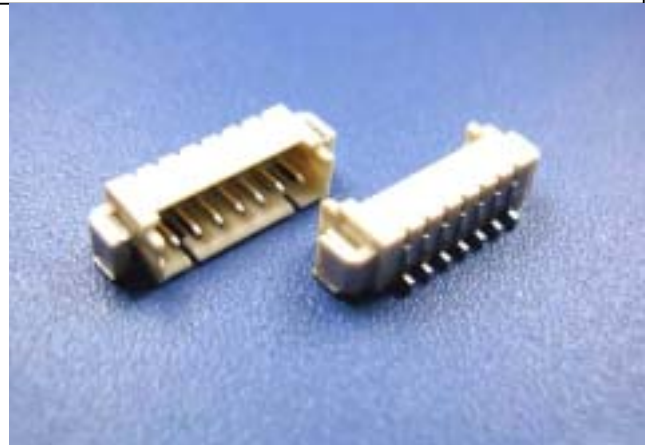

**P.C.B Layout**

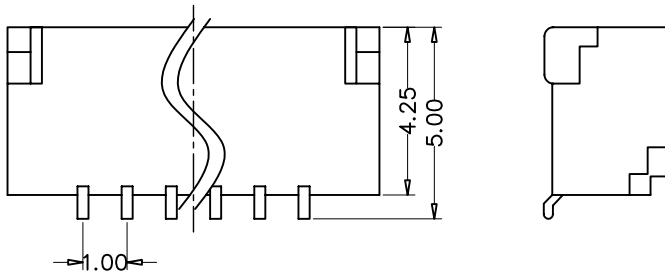

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

W	X	X	X	XX	--	X	XX	--	XX
Pitch	Versions	Row Option	Pin NO	--	Connector Type	Contact Plating	--	Glide NO	
B 0.80mm C 1.00mm D 1.25mm F 2.00mm G 2.50mm H 2.54mm I 3.96mm K 5.08mm	A 180° B 90° C SMT	1 Single Row 2 Dual Row	02 to 20	--	A: A Type B: B Type	01 Tin 02 Gold Flash 03 Gold/Tin	--	01-99	