
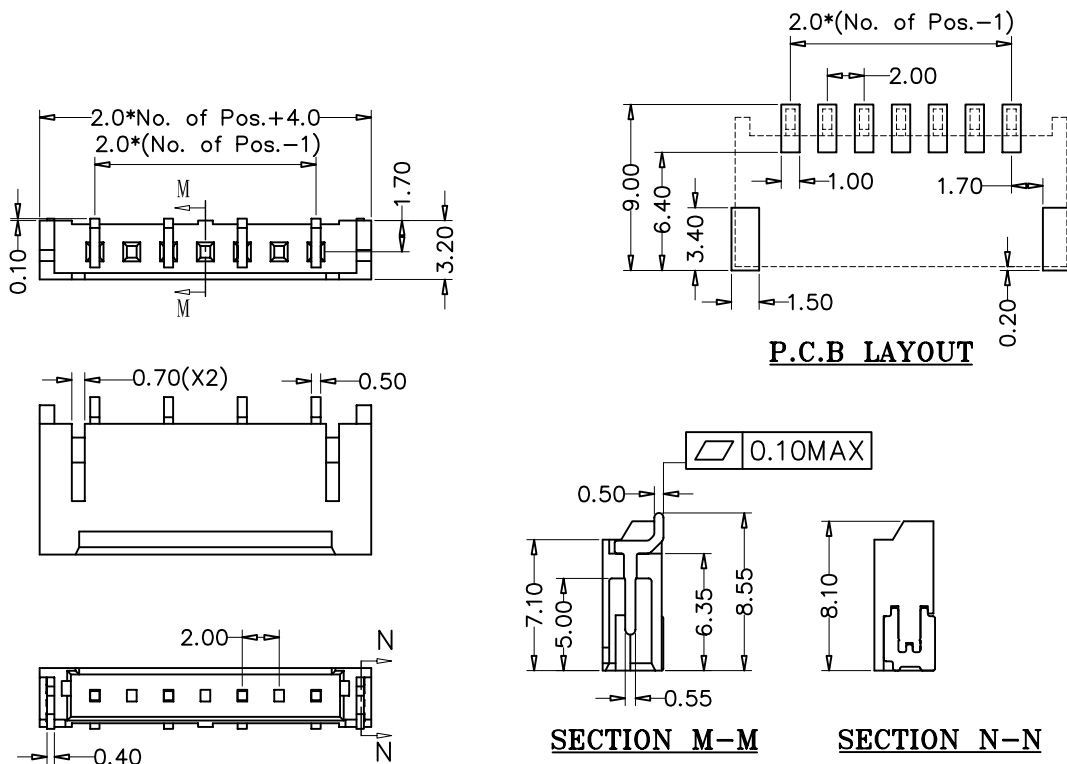


# B/H 2.0mm(0.079") Wafer Single Row SMT 02 to 15 Contacts

## SPECIFICATIONS

Current Rating: 1 Amp  
 Insulator Resistance: 500 Megohms min.  
 Dielectric Withstanding: AC 1800V  
 Contact Resistance: 20 megohms Max.  
 Operating Temp.: -25°C ~ +85°C  
 Contact Material: Brass  
 Insulator Material: High Temperature Thermoplastic  
 Plated(\*Standard): Tin plated

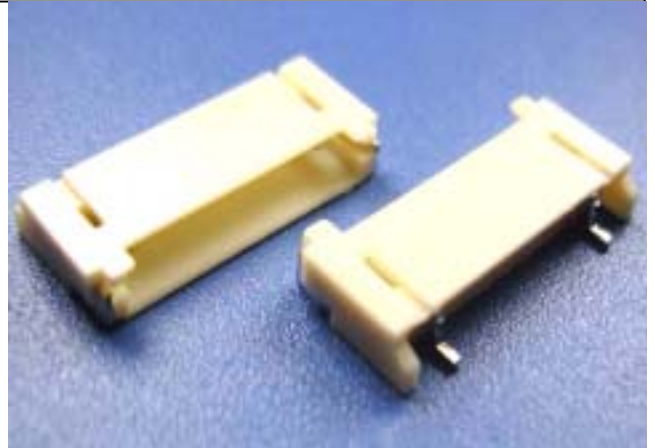

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

W	X	X	X	XX	--	X	XX	--	XX				
Pitch		Versions		Row Option		Pin NO		Connector Type		Contact Plating		Glide NO	
B	0.80mm	A	180°	1	Single Row	02 to 20	A:	A Type	01	Tin	01-99		
C	1.00mm	B	90°	2	Dual Row		B:	B Type	02	Gold Flash			
D	1.25mm	C	SMT						03	Gold/Tin			
F	2.00mm												
G	2.50mm												
H	2.54mm												
I	3.96mm												
K	5.08mm												