
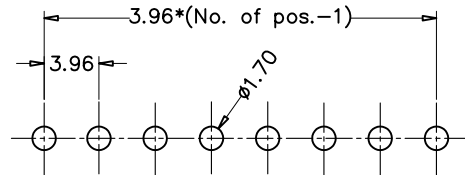
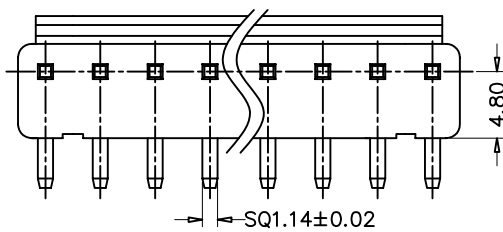




3.96mm(0.156") Wafer Single Row R/A 02 to 16 Contacts

SPECIFICATIONS

Current Rating:	5 Amp
Insulator Resistance:	5000 Megohms min.
Rated voltage:	250V AC, DC
Dielectric Withstanding:	AC 1000V
Operating Temp. :	-25°C ~ +85°C
Insulator Material:	PA-66 UL94V-0 ROHS
Contact Material:	Brass
Plated(*Standard):	Tin Plated

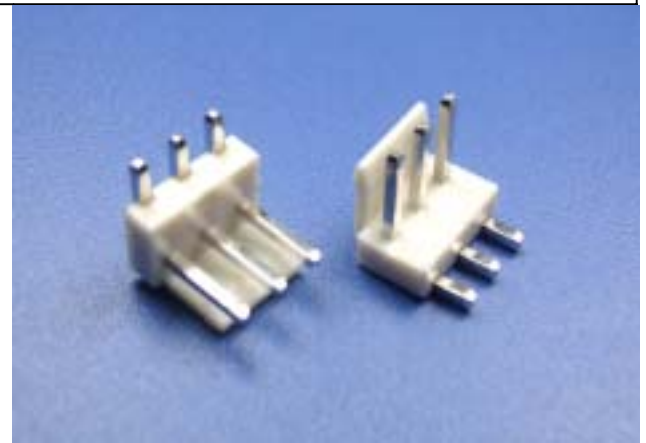

P.C.B LAYOUT

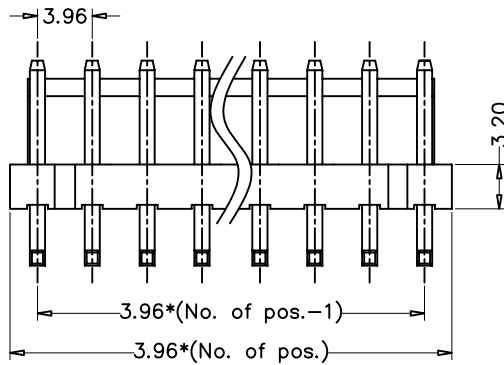

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

W	X	X	X	XX	--	X	XX	--	XX				
Pitch		Versions		Row Option		Pin NO		Connector Type		Contact Plating		Glide NO	
B	0.80mm	A	180°	1	Single Row	02	to 20	A:	A Type			01	99
C	1.00mm	B	90°	2	Dual Row			B:	B Type				
D	1.25mm	C	SMT										
F	2.00mm												
G	2.50mm												
H	2.54mm												
I	3.96mm												
K	5.08mm												