


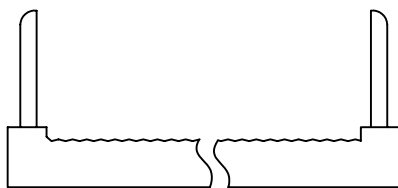
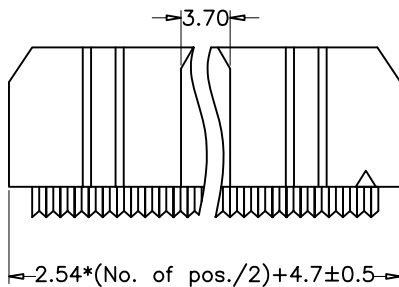
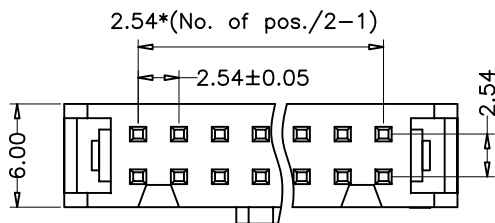


2.54mm(0.1") IDC Socket Dual Row For 1.27mm center Flat Ribbon Cable

SPECIFICATIONS

Current Rating: 3 Amp
 Insulator Resistance: 1000 Megohms min
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40° C ~ +105° C
 Insulator Material: PBT+30%G.F UL94V-0 ROHS
 Contact Material: Copper Alloy
 Plating: Selective Gold over nickel

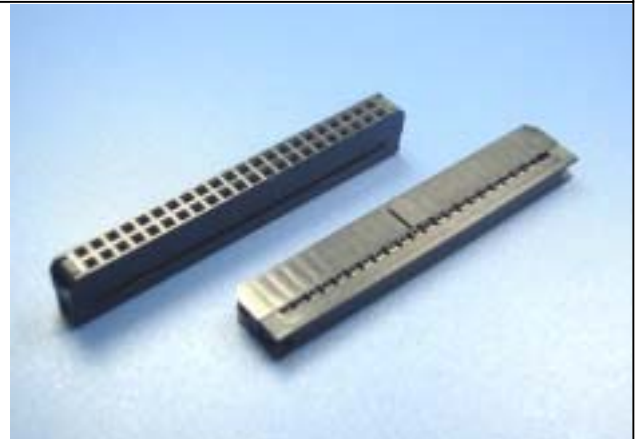

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

IDC	X	X	XX	--	X	X	XX	--	XX				
Connector Pitch	F 2.00mm H 2.54mm	Wire Pitch	C 1.00mm E 1.27mm	Pin NO	06 to 64	Connector Type	A: With Nose B: W/O Out Nose	Housing Colour	01 Black 02 Blue 03 Green 04 Yellow	Contact Plating	01 Tin 02 Gold Flash 03 Gold/Tin	Glide NO	01-99