
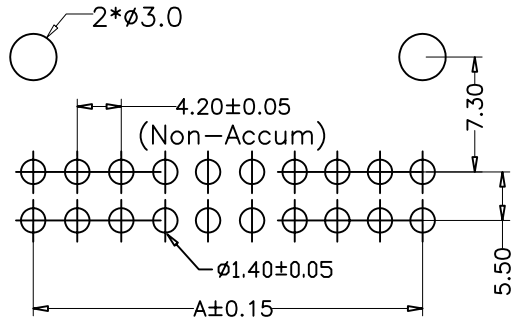
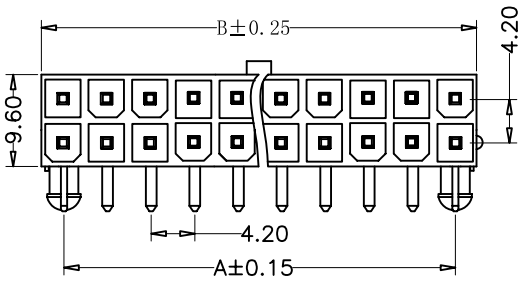




4.20mm(0.165") ATX Dual Row Right Angle

SPECIFICATIONS

Current Rating:	9A AC DC
Voltage Rating:	250V AC DC
Insulator Resistance:	1000 Megohms min.
Withstand Voltage :	AC 1500V/min
Operating Temp. :	-25°C ~ +85°C
Insulator Material:	PA-66 (UL94V-2) ROHS
Contact Material:	Brass
Plated(*Standard):	Tin Plated

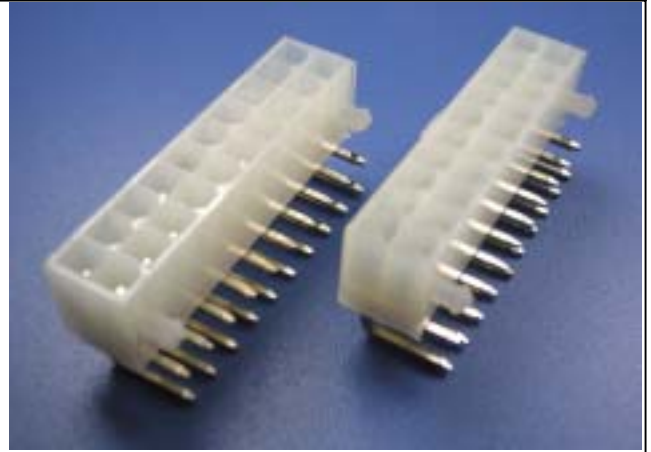

RECOMMENDED P. C. B HOLE PATTERN

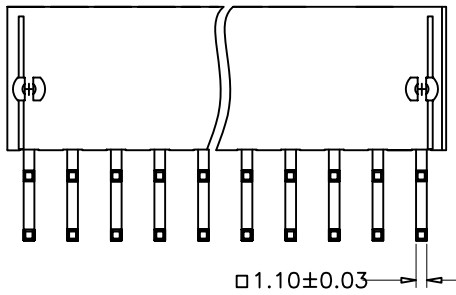

PIN NO.	Dimension (mm)	
	A	B
2*1P		5.40
2*2P	4.20	9.60
2*3P	8.40	13.80
2*4P	12.60	18.00
2*5P	16.80	22.20
2*6P	21.00	26.40
2*7P	25.20	30.60
2*8P	29.40	34.80
2*9P	33.60	39.00
2*10P	37.80	43.20
2*11P	42.00	47.40
2*12P	46.20	51.60

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

