
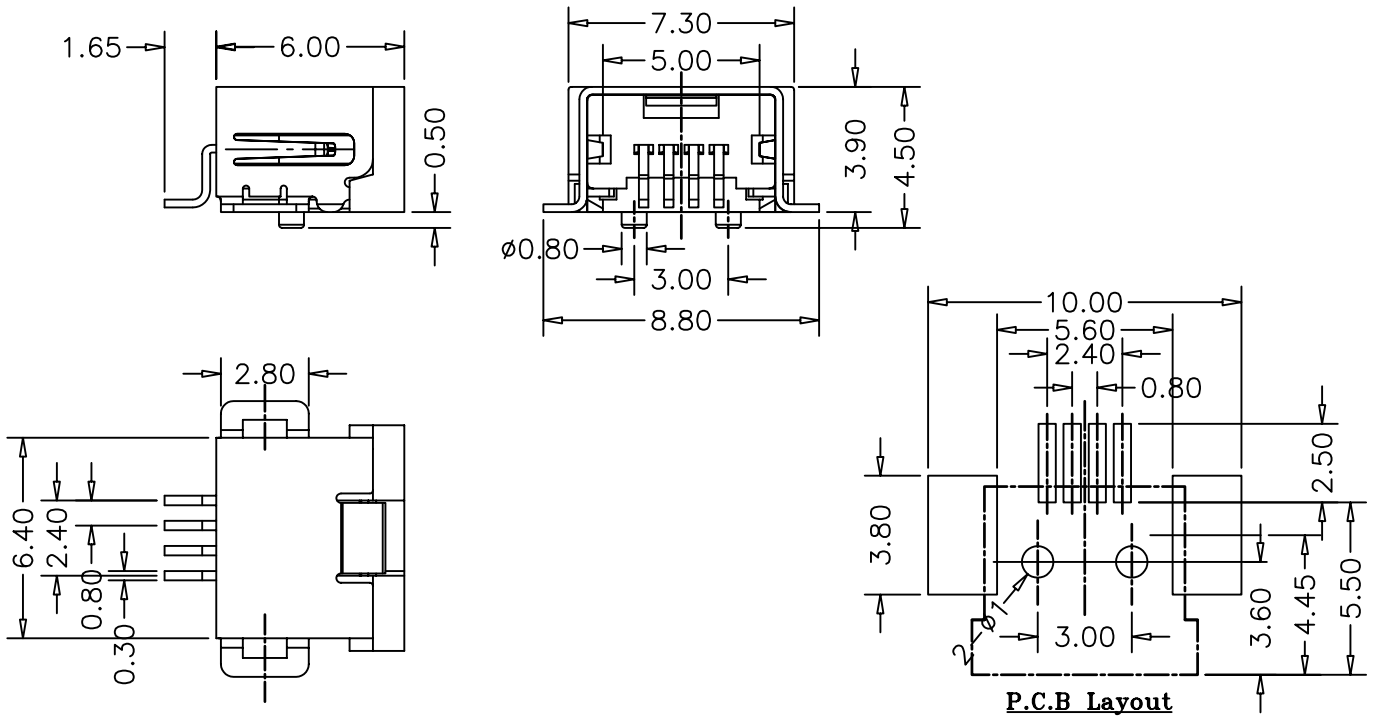


Mini USB A Type Female SMT 4 Pin

SPECIFICATIONS

Current Rating:	0.5 Amp
Insulator Resistance:	100 Megohms min.
Dielectric Withstanding:	AC 100V
Contact resistance:	50mΩ MAX.
Operating Temp. :	-20°C~85°C
Insulator Material:	Nylon-6T(UL94V-0) ROHS
Contact Material:	Copper alloy
Contact Plated:	Plated Gold in mating area; Tin on solder tails
Shell Material	Copper alloy
Shell Plated	Ni plated

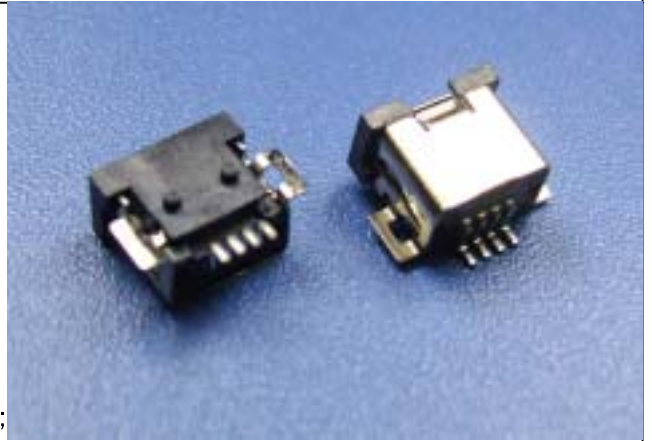

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

MU	X	X	X	X	XX	-	X	X	X	-	XX
Connector Type	Gender	Versions	Deck Options	Pin NO	Contact Plating	Shell Plating	Housing Colour	Glide NO			
A: A Type B: B Type C: C Type P: P Type H: H Type V: V Type	M Male/Plug F Female /Receptacle	D DIP Type M SMT Type S Soldering	1 Single Deck 2 Double Deck 3 Triple Deck	04 4Pin 05 5Pin	1 Tin 2 Gold Flash 3 Gold/Tin 4 Gold3μ" 5 Gold5μ" 6 Gold10μ" 7 Gold30μ"	1 Tin 2 Nickel 3 Stainless Stell S Special	B Block N Beige W White	01-99			