


USB A Type Female R/A 4 Pin

SPECIFICATIONS

Current Rating:	1.0 Amp
Insulator Resistance:	1000 Megohms min.
Dielectric Withstanding:	AC 500V
Contact resistance:	30m Ω E MAX.
Operating Temp. :	-40°C ~ + 85°C
Contact Material:	Phosphor Bronze
Insulator Material:	PBT UL94V-0 ROHS
Contact Plated:	Selective Plated
Shell Material	Brass
Shell Plated	Ni plated

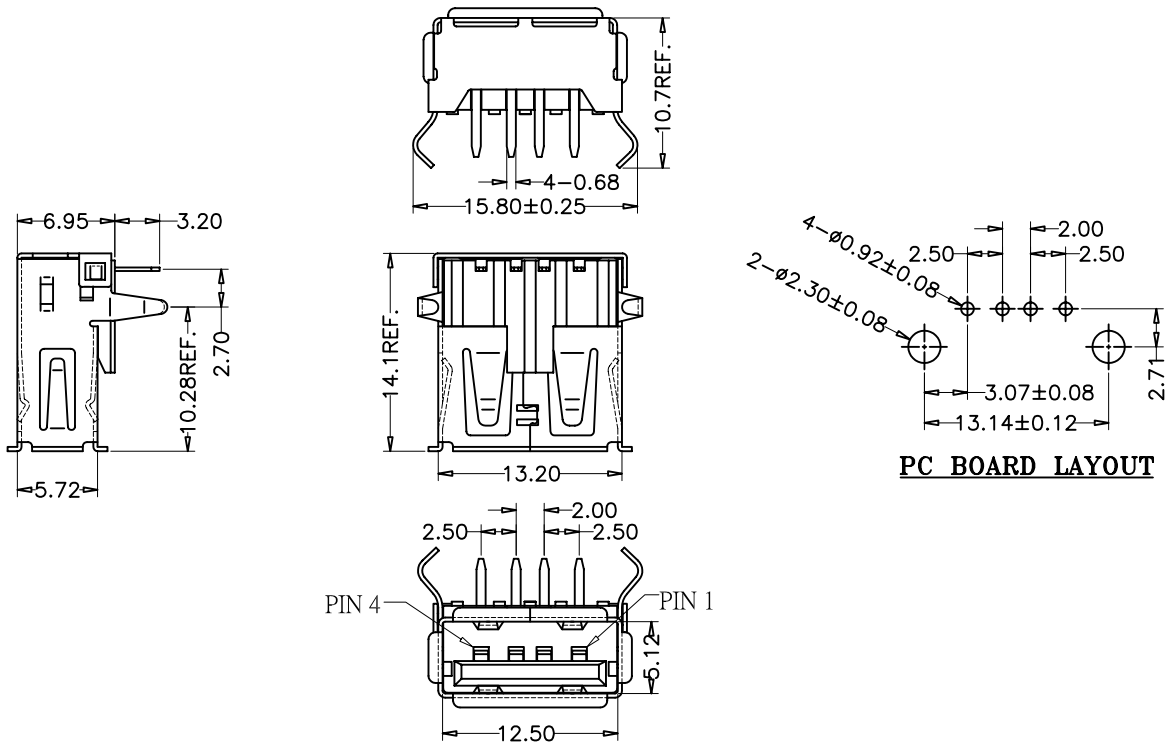

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

U	X	X	X	X	XX	-	X	X	X	-	XX
Connector Type	Gender	Versions	Deck Options	Pin NO	Contact Plating	Shell Plating	Housing Colour	Glide NO			
A: A Type B: B Type C: C Type P: P Type H: H Type V: V Type	M Male/Plug F Female /Receptacle	D DIP Type M SMT Type S Soldering	1 Single Deck 2 Double Deck 3 Triple Deck	04 4Pin 08 8Pin	1 Tin 2 Gold Flash 3 Gold/Tin 4 Gold3 μ " 5 Gold5 μ " 6 Gold10 μ " 7 Gold30 μ "	1 Tin 2 Nickel 3 Stainless Steel S Special	B Black N Beige W White	01-99			