
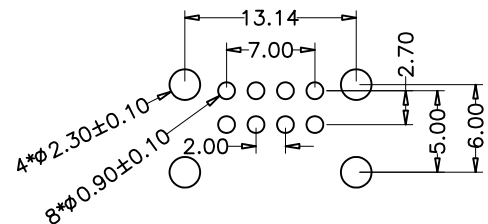


USB A Type Female R/A 4 Pin

SPECIFICATIONS

Corrent Rating: 1.0Amps
 Insulator resistance: 1000Megohms Max
 Contact resistance: 30mΩ MAX.
 Dielectric withstanding: 500V AC R. M. S
 Operating Temp.: -55°C ~ + 85°C
 Insulator material: PBT+30%G.F UL94V-0 ROHS
 Contact material: Copper Alloy
 Plated(*Standard): Gold on contact area,
 100u"matte Tin plated
 Shell Material: Steel
 Shell plating: Ni plated

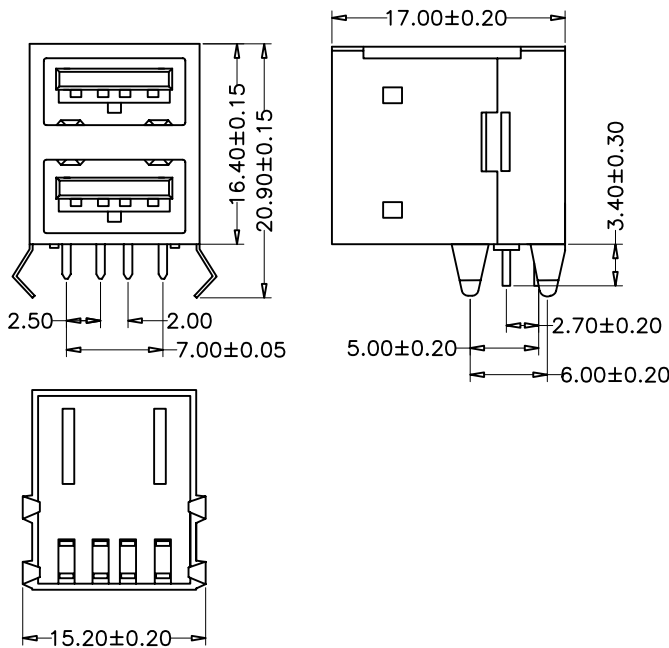

PCB LAYOUT

How to order the Part No. (Please replace "X" with appropriate coding listed in the tables below.)

| | | | | | | | | | | | |
|--|--|---|---|---|--------------------|---|---|---|-------------------------------|---|----------|
| U | X | X | X | X | XX | - | X | X | X | - | XX |
| Connector Type | Gender | Versions | | Deck Options | Pin NO | | Contact Plating | Shell Plating | Housing Colour | | Glide NO |
| A: A Type B: B Type C: C Type P: P Type H: H Type V: V Type | M Male/Plug F Female /Receptacle | D DIP Type M SMT Type S Soldering | | 1 Single Deck 2 Double Deck 3 Triple Deck | 04 4Pin 08 8Pin | | 1 Tin 2 Gold Flash 3 Gold/Tin 4 Gold3μ" 5 Gold5μ" 6 Gold10μ" 7 Gold30μ" | 1 Tin 2 Nickel 3 Stainless Stell S Special | B Black N Beige W White | | 01-99 |